

Desalination Unit

Technical Specifications

Model 18 TS


18 000 litres/day

High Volume

Self Contained

Suitable for:

- Larger Vessels
- Island Resorts

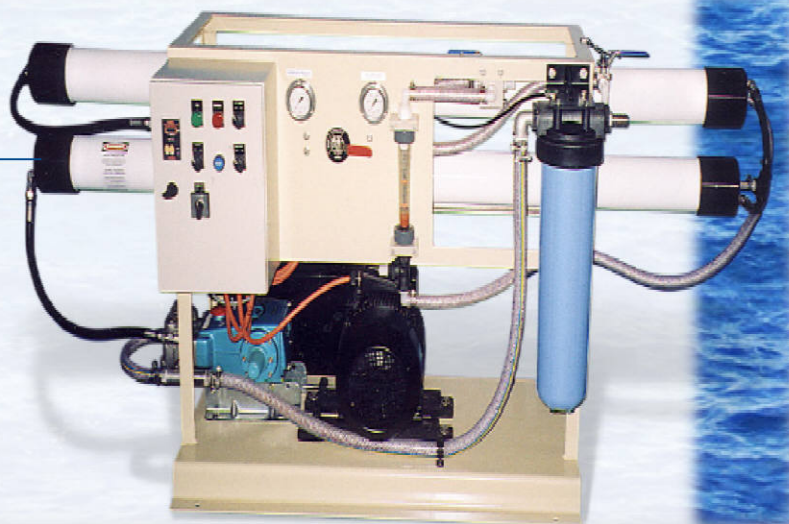

Name -Type	Seawater Desalinator
Model #	18TS
Build Date	2008
Owner	Hagstrom Drilling Pty Ltd
Electric Power	5.5 kW, 3 phase
Standard Features	<p>Production rate: 9,000 litres/shift (based on feed salinity of 35,000ppm)</p> <p>Dimensions: 2.75m L x 1.0m H x 0.65m W</p> <p>Weight: 390kg</p> <p>Electric Motors: TEFC</p> <p>Salinity monitor with automatic dump valve</p> <p>Preset pressure regulating valve</p> <p>Low pressure cut-out</p> <p>All pressure gauges from 316 stainless steel, liquid filled</p> <p>Frame construction: powder-coated aluminium</p> <p>Built in mechanical and electrical safety</p>

All major service and maintenance is carried out at Hagstrom Drilling's Workshop in Canning Vale, Perth WA. A Detailed report on service and maintenance history is available on request.