




Drilling services and solutions
working for your business



Cone Penetration Rig PR003 – Technical Specifications

| | |
|---------------------------------------|---|
| # | PR003 |
| Name, Model No. | Stand Alone Hyson 200kN Static cone penetrometer with external hydraulic powerpack |
| Build Date | Build 2010 |
| Owner | Hagstrom Drilling Pty Ltd |
| Carrier | Portable for mounting on Jack up barges, Marsh buggy & Track carrier's |
| Rig Dimensions | Length 2700 mm Width 2250 mm Height 1750 mm Weight Approximate 2000 kg's |
| Safety Features | Automatic Rod Clamps Fire Extinguisher Emergency Shut Down System Oil & Fuel Spill Kit |
| Hyson 200 kn Static Cone Penetrometer | Pushing Capacity 250kN max Pulling Capacity 320kN max Pushing speed 2 cm/s Pulling speed 16 cm/s |
| Testing Methods | Mechanical Cone, CPT, CPTu, SCPTu, Marchetti Seismic & Flat Dilatometer, Mostap 1.8m & 0.5m Soil sampling, Enviro cone, Conductivity, Vibrating and Non Vibrating Wire Piezometer's Installations |
| Capabilities | Electrical CPT, CPTU and Mechanical testing |

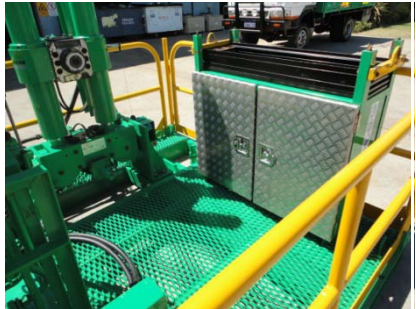

All major service and maintenance is carried out at the Hagstrom Drilling's Workshop Canning Vale, Perth WA. A detailed report on service and maintenance history is available on request.

